



# Alba

Tables

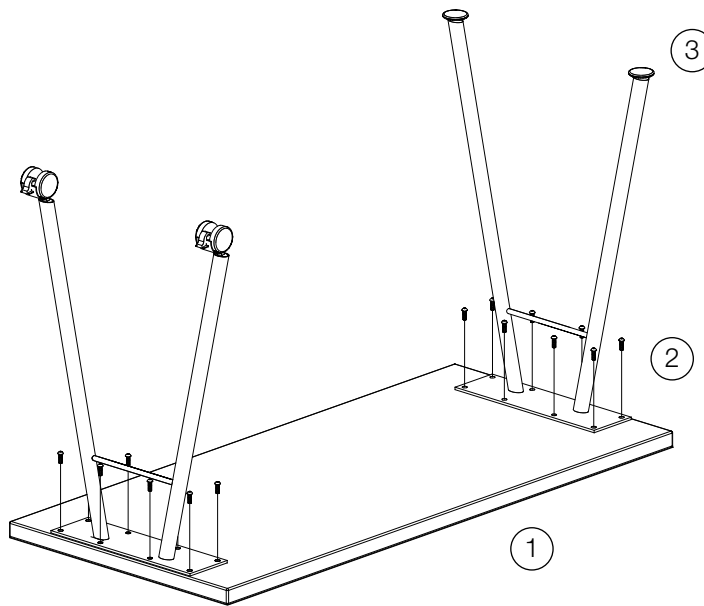

## Hardware Included:



#12 x 1"  
Pan Head Screw  
(only used when keel is required)



1/4-20 x 3/4"  
BH Bolt

## Tools Required:

- 5/32 Allen Wrench
- #3 Phillips Head Screw Driver  
(when keel is required)

## Step 1:

Place the table top upside down on a clean, padded surface.

## Step 2:

Center leg assembly on underside of the table top and align legs to preinstalled inserts (the narrow end of the leg-plate faces the outside of the table). Once aligned, attach legs using 1/4-20 x 3/4 BH hex drive bolt **(DO NOT OVER TIGHTEN)**.

## Step 3:

Install Glides or Casters, if applicable.

## KEEL REQUIRED FOR TABLES 60" IN LENGTH OR GREATER

**NOTE: ATTACHING TABLE SUPPORTING KEEL: CENTER KEEL ALONG MIDLINE AND EQUAL DISTANCE FROM EACH END. ATTACH USING #12 X 1" SCREWS.**

191205

